

# Aquastorm<sup>®</sup> 50

## Batch Cleaning System

**In-line technologies in a batch footprint.**

### Matching Footprint to Application

Today's challenges for PCB manufacturers hinges on high density, increased complexity, and miniaturization. Manufacturers that currently clean with a batch-type cleaner are looking for a solution to increase cleaning capability without moving to an in-line cleaner. The Aquastorm 50 batch cleaner utilizes technologies that are common to the Aquastorm 100 and 200 in-line cleaners and offered in a batch footprint.

### Patent Pending Fluid Delivery System

The objective of a mechanical fluid delivery system is to clean under difficult, low stand-off components by maximizing the physical energy delivered at the surface of the area to be cleaned. The Aquastorm 50 wash fluid delivery system utilizes multiple jet impact cleaning (JIC) sprays that create a web of omni-directional dynamic energy to remove flux residue. The web (or storm) of mechanical fluid energy that is created delivers the dynamic energy required to achieve higher product reliability by effectively removing flux residues under the low stand-off components.

### Intelligent Rinse Control

The Intelligent Rinse Control feature guarantees desired conductivity of rinse water through continuous monitoring and control of the rinse process while maximizing water conservation. Each cycle can be user defined by cleanliness of rinse water (board cleanliness of 1  $\mu$ S) or by the number of cycles.

### Patented Torrid Zone<sup>®</sup> Drying

The Torrid Zone drying that has set the industry benchmark for drying on in-line cleaners is a standard feature on the Aquastorm 50. Our patented convection drying technologies for cleaning applications delivers a controlled dynamic process that effectively removes moisture from the PCB. Typical performance includes drying complex assemblies to within .1g of prewash weight. A benefit of Torrid Zone drying is that completely dry PCB's can go straight to test after cleaning.



# Aquastorm 50 Batch Cleaning System


## Durable Design

The brand name of Electrovert holds the reputation of having the 'longest product life cycle' within the Electronic Equipment Manufacturers' industry. The reputation holds true for the Aquastorm 50. While typical batch cleaners are modified versions of residential dishwashers, the Aquastorm 50 utilizes field-proven technologies that are common across the Aquastorm in-line cleaners. The fluid delivery designs, pump designs, and drying technologies are shared across the Aquastorm in-line series. The software GUI (Graphical User Interface) and electrical I/O system are common across all Electrovert product lines. These designs are field proven in demanding production environments yet provide commonality across multiple Electrovert platforms.



## Advanced User Interface

The software has an advanced user interface that utilizes a 21" touch screen PC with Windows® 7 operating system. All machine operation parameters are easily viewed to optimize the machine and process controls. The software GUI is common across all Electrovert cleaning, wave, and reflow product lines. The benefit is that all machine operations, controls, set-up, drop-down menus, and timer functionalities are similar and easy to use.

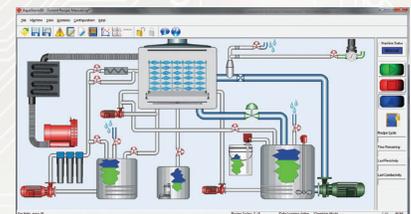

## World Wide Support

The employees of Electrovert are dedicated to providing world class service and support to our global partners. With facilities in the USA, Mexico, Europe, Asia and an extensive network of service, applications, and process engineers, Electrovert is positioned to support our customer's requirements. All Electrovert cleaning, wave, and reflow equipment are designed and built in Camdenton, Missouri USA.

### AQUASTORM 50 SPECIFICATIONS

Machine Dimensions (L x W x H)	1527 mm (60.1 in) x 969 mm (38.1 in) x 1826 mm (71.9 in)
Cleaning Dimensions	508 mm (20 in) x 381 mm (15 in) maximum board size in standard basket
Exhaust Requirements	(Qty 1) 101 mm (4 in) static port (no vacuum or exhaust blower required)
Standard Utility Requirements	480 VAC, 3 phase, 60Hz, 40 Amps 380 VAC, 3 phase, 50Hz, 47 Amps 230 VAC, 3 phase, 60Hz, 81 Amps
Drain Plumbing Requirements	(Qty 1) 1 in - ½ in MNPT
Supply Water Requirements	(Qty 1) ½ in MNPT of 15.1 l/min (4 gpm) at 50 psi with 49°C (120°F) deionized water
Air Supply Requirements	379-586 kPa (55-85 psi) at 28 SCFM (intermittent)

ITW EAE is a division of Illinois Tool Works, Inc. It is a consolidation of all of its Electronic Assembly Equipment and Thermal Processing Technology. The group includes world-class products from MPM, Camalot, Electrovert (Speedline), Vitronics Soltec and Despatch.

© 2016 ITW all rights reserved. Aquastorm 50 10-16

[www.itweae.com](http://www.itweae.com)

# Electrovert

Cleaning & Soldering Solutions

ITW EAE