



ELPA™ 2000 & 4000



Labels for Life.

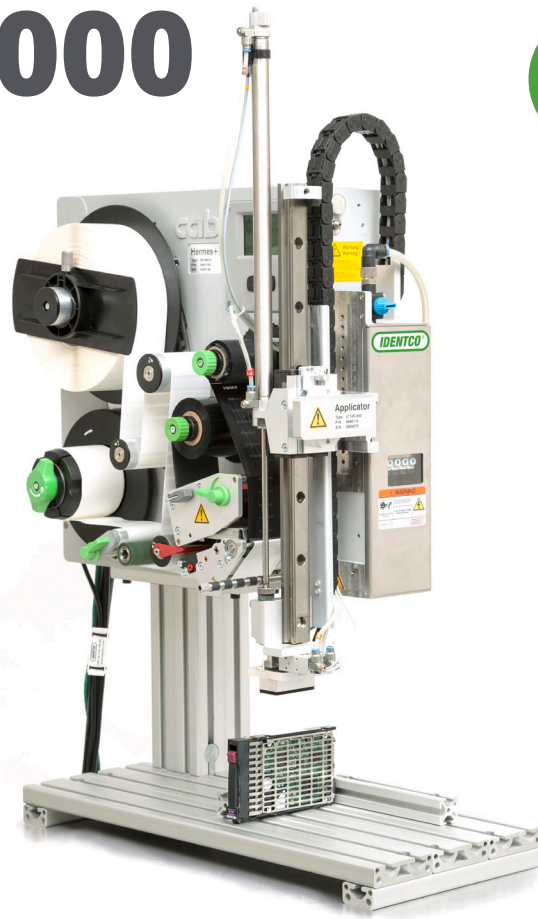

Print and Apply Applicator

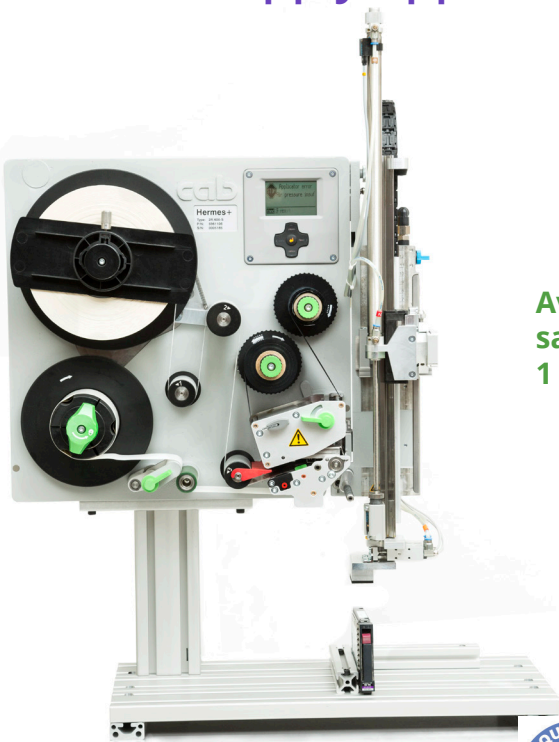

Available to quote today!
sales@identco.com
1 (800) 533-2559

Features

- Precise print and apply up to +/- .2mm (.007")
- Print and apply labels as small as 4mm x 4mm
- Large graphic display
- Application can be bottom to top, top to bottom or from either side
- Easily integrated into production lines or production work cells
- Product can be presented to the applicator by hand or by automation
- Die-cast aluminum chassis for solid framework
- Ball-bearing transport rollers ensure highly accurate feeding of labels
- Easy to change printhead without adjustments or setups
- Host connection or stand alone operation



www.identco.com

ELPA™ 2000 & 4000

Print and Apply Applicator



Labels for Life.

■ Standard □ Option

LABEL PRINTER

LABEL PRINTER	ELPA™					
	2000/300	2000/600	4000/203	4000/300	4000/600	
Printhead	Print method	Thermal transfer / Thermal direct				
	Print resolution dpi	300	600	203	300	600
	Print speed up to mm/s	150	100	250	250	100
	Print width mm	54.2	57.0	104.0	105.6	105.6
Material	Media roll total diameter up to mm	-	-	205/305	205/305	205/305
	Label width mm	4 - 58	4 - 58	10 - 114	10 - 114	10 - 114
	Label height when dispensing mm	4 - 200	4 - 200	8 - 250	8 - 250	8 - 250
Ribbon	Ink	Outside or inside				
	Ribbon length variable up to mm	500	500	500	500	500
Printer Dimensions	Height x depth mm (205/305)	400 x 400 / 538 x 518				
	Width mm	200	200	255	255	255
Electronics	Processor high speed clock rate MHz	266	266	266	266	266
	RAM MB	64	64	64	64	64
	Memory IFFS MB Flash	8	8	8	8	8
	Slot for Compact Flash Memory Card	■	■	■	■	■
	Slot for wireless LAN card	■	■	■	■	■
	Battery buer for	Real-time clock, Printout of time and date, Data storage on shut-down				
	Warning signal	Acoustic signal in case of error				
	Centronics bi-directional acc. IFFS 1284	□	□	□	□	□
Interfaces	RS232 C	■	■	■	■	■
	USB 2.0 High Speed Slave for PC	■	■	■	■	■
	Ethernet 10/100 Base T	■	■	■	■	■
	RS422, RS485	□	□	□	□	□
	Peripheral connection	■	■	■	■	■
	WLAN card 802.11 b/g	□	□	□	□	□
	2x USB Master for	External operation panel, scanner, keyboard, service key				



UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16,5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866